


VRX-2200

Audio/Video Receiver 2.4 GHz

This new receiver will give you opportunity to monitor 2.1-2.3 GHz video band. Simply hook-up this receiver to any video monitor. It is fully portable, extremely sensitive and easy to use. You can get any frequency in 2100 - 2300 MHz band by turning super precision multiturn potentiometer. This receiver has built-in a special AFT (Automatic frequency tuning) control function for the best stability.

Special Audio/Video Receiver VRX 2200

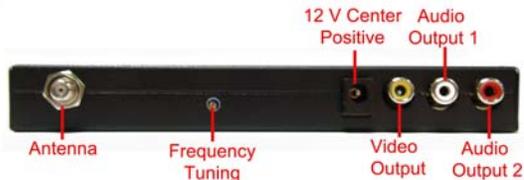

Technical Specifications

1. Frequency band 2100-2300 MHz
2. Sensitivity -90 dBm
3. Antenna Input 50 ohms
4. 12 V DC / 0.3 A
5. Video Output 1 V / 75 ohms
6. Two Audio Outputs
7. Frequency Tunable

Technical Specifications	
Operating Frequencies:	2100 MHz- 2300 MHz
Channel:	Tunable
DC Voltage:	9 V- 12 V
RF power:	N/A
Minimum required voltage:	9 V
Battery power:	12 V/ 300 mA
Video distortion:	3%
Sensitivity:	-90 dBm
Video Format:	PAL, NTSC
Current Consumption:	280 mA / 9 V
Antenna:	Recommended high gain, omni directional ant.
Antenna Connector:	SMA
Impedance:	50 ohms
Video output Connector:	RCA F
Video Impedance:	75 ohms
Two Audio outputs:	300 mV per channel
Carrier frequencies for audio channels:	6 MHz and 6.5 MHz
Temperature Range:	-25 +65* C
Dimensions:	2.5" X 5.7" X 0.8"
Weight:	200 grams
Demodulation:	WFM