


LX-1700/10
AUDIO / VIDEO TRANSMITTER
1.7 GHz BAND

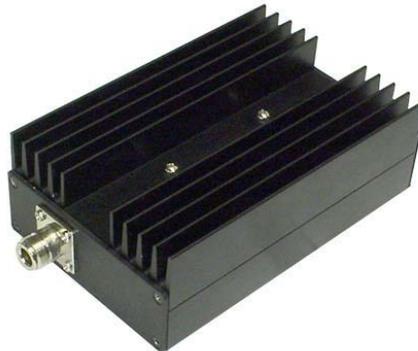

The new 1.7 GHz Audio/Video transmitter is a special design for Military applications capable to work in extremely low or high temperature range. This transmitter has 8 easy to change channels and 10 W RF power. This video transmitter works from 12 V- 16 V.
 Dimensions: 6.0 " X 4.0 " X 2.0 ".

TRANSMITTER FEATURE:
Operating Frequencies: 1700 MHz- 1900 MHz
Channels selection: Front panel selectable
DC Voltage: 12 V
RF power: 10 W/ 12 V
Minimum required voltage: 10 V
Maximum RF power: 14 V
Video distortion: 2%
Maximum range: 16 miles from the AIR
Video Format: PAL, NTSC
Current Consumption: 4,500 mA / 12 V
Antenna: N/A
Antenna Connector: N type (SMA on request)
Impedance: 50 ohms
Video Connector: RCA F or open wire
Video Impedance: 75 ohms
Video level: 5 V
Audio level: 300 mV
Temperature Range: -40 +75° C
Dimensions: 6" X 4" X 2"
Weight: 750 grams
Modulation: WFM